

2:1 Input Range 2A3SD Series

3Watt SIP8 Package Single Output, 1kVDC Isolation, Operating Temp. -40to+71°C

型名	入力電圧(V) (入力電圧幅 V)	出力電圧(V)	出力電流(mA)	効率(%)	負荷変動率	リップルノイズ
2A3SD-053.3	5 (4.5-9)	3.3	600	72-74	±0.5% Typ	50mVp-p max
2A3SD-0505		5	600	76-78		
2A3SD-0509		9	333	77-79		
2A3SD-0512		12	250	78-80		
2A3SD-0515		15	200	79-80		
2A3SD-123.3	12 (9-18)	3.3	600	72-74		
2A3SD-1205		5	600	76-78		
2A3SD-1209		9	333	77-79		
2A3SD-1212		12	250	78-80		
2A3SD-1215		15	200	79-80		
2A3SD-243.3	24 (18-36)	3.3	600	72-74		
2A3SD-2405		5	600	76-78		
2A3SD-2409		9	333	77-79		
2A3SD-2412		12	250	78-80		
2A3SD-2415		15	200	79-80		
2A3SD-483.3	48 (36-72)	3.3	600	72-74		
2A3SD-4805		5	600	76-78		
2A3SD-4809		9	333	77-79		
2A3SD-4812		12	250	78-80		
2A3SD-4815		15	200	79-80		

2:1 Input Range 2A3SD Series

3Watt SIP8 Package Dual Output, 1kVDC Isolation, Operating Temp. -40to+71°C

型名	入力電圧(V) (入力電圧幅 V)	出力電圧(V)	出力電流(mA)	効率(%)	負荷変動率	リップルノイズ
2A3SD-053.3D	5 (4.5-9)	±3.3	±300	72-74	±0.5% Typ	50mVp-p max
2A3SD-0505D		±5	±300	76-78		
2A3SD-0509D		±9	±167	77-79		
2A3SD-0512D		±12	±125	78-80		
2A3SD-0515D		±15	±100	79-80		
2A3SD-123.3D	12 (9-18)	±3.3	±300	72-74		
2A3SD-1205D		±5	±300	76-78		
2A3SD-1209D		±9	±167	77-79		
2A3SD-1212D		±12	±125	78-80		
2A3SD-1215D		±15	±100	79-80		
2A3SD-243.3D	24 (18-36)	±3.3	±300	72-74		
2A3SD-2405D		±5	±300	76-78		
2A3SD-2409D		±9	±167	77-79		
2A3SD-2412D		±12	±125	78-80		
2A3SD-2415D		±15	±100	79-80		
2A3SD-483.3D	48 (36-72)	±3.3	±300	72-74		
2A3SD-4805D		±5	±300	76-78		
2A3SD-4809D		±9	±167	77-79		
2A3SD-4812D		±12	±125	78-80		
2A3SD-4815D		±15	±100	79-80		

2:1 Input Range 2A3SD Series




3Watt SIP8 Package Single Output, 2kVDC Isolation, Operating Temp. -40to+85°C

型名	入力電圧(V) (入力電圧幅 V)	出力電圧(V)	出力電流(mA)	効率(%)	負荷変動率	リップルノイズ
2A3SD-053.3K2	5 (4.5-9)	3.3	600	72-76	±0.5% Typ	50mVp-p max
2A3SD-0505K2		5	600	73-80		
2A3SD-0512K2		12	250	77-82		
2A3SD-0515K2		15	200	80-82		
2A3SD-123.3K2	12 (9-18)	3.3	600	72-76		
2A3SD-1205K2		5	600	73-80		
2A3SD-1212K2		12	250	77-82		
2A3SD-1215K2		15	200	80-82		
2A3SD-243.3K2	24 (18-36)	3.3	600	72-76		
2A3SD-2405K2		5	600	73-80		
2A3SD-2412K2		12	250	77-82		
2A3SD-2415K2		15	200	80-82		
2A3SD-483.3K2	48 (36-72)	3.3	600	72-76		
2A3SD-4805K2		5	600	73-80		
2A3SD-4812K2		12	250	77-82		
2A3SD-4815K2		15	200	80-82		

2:1 Input Range 2A3SD Series

3Watt SIP8 Package Dual Output, 2kVDC Isolation, Operating Temp. -40to+85°C

型名	入力電圧(V) (入力電圧幅 V)	出力電圧(V)	出力電流(mA)	効率(%)	負荷変動率	リップルノイズ
2A3SD-053.3DK2	5 (4.5-9)	±3.3	±300	72-75	±0.5% Typ	50mVp-p max
2A3SD-0505DK2		±5	±300	74-79		
2A3SD-0512DK2		±12	±125	77-81		
2A3SD-123.3DK2	12 (9-18)	±3.3	±300	72-75		
2A3SD-1205DK2		±5	±300	74-79		
2A3SD-1212DK2		±12	±125	77-81		
2A3SD-243.3DK2	24 (18-36)	±3.3	±300	72-75		
2A3SD-2405DK2		±5	±300	74-79		
2A3SD-2412DK2		±12	±125	77-81		
2A3SD-483.3DK2	48 (36-72)	±3.3	±300	72-75		
2A3SD-4805DK2		±5	±300	74-79		
2A3SD-4812DK2		±12	±125	77-81		

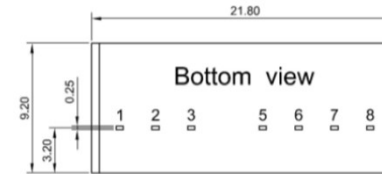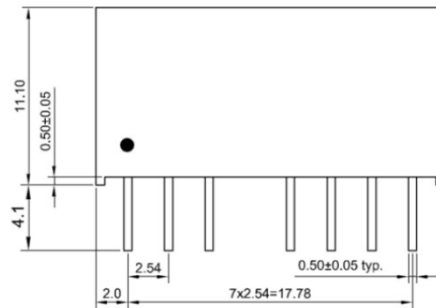

ピン配置

Pin	1	2	3	4	5	6	7	8
Single	-Vin	+Vin	CTRL	No pin	NC	+Vout	-Vout	NC
Dual	-Vin	+Vin	CTRL	No pin	NC	+Vout	COM	-Vout