

2:1 Input Range 2A3TI Series





3Watt SMD24 Package Single Output, 1kVDC Isolation, Operating Temp. -40to +100°C

型名	入力電圧(V) (入力電圧幅 V)	出力電圧(V)	出力電流(mA)	効率(%)	負荷変動率	リップルノイズ
2A3TI-053.3	5 (4.5-9)	3.3	900	66-76	±0.6% Typ	50mVp-p max
2A3TI-0505		5	600	71-79		
2A3TI-0509		9	333	74-83		
2A3TI-0512		12	250	75-85		
2A3TI-0515		15	200	75-86		
2A3TI-123.3	12 (9-18)	3.3	900	66-76		
2A3TI-1205		5	600	71-79		
2A3TI-1209		9	333	74-83		
2A3TI-1212		12	250	75-85		
2A3TI-1215		15	200	75-86		
2A3TI-243.3	24 (18-36)	3.3	900	66-76		
2A3TI-2405		5	600	71-79		
2A3TI-2409		9	333	74-83		
2A3TI-2412		12	250	75-85		
2A3TI-2415		15	200	75-86		
2A3TI-483.3	48 (36-72)	3.3	900	66-76		
2A3TI-4805		5	600	71-79		
2A3TI-4809		9	333	74-83		
2A3TI-4812		12	250	75-85		
2A3TI-4815		15	200	75-86		

2:1 Input Range 2A3TI Series

3Watt SMD24 Package Dual Output, 1kVDC Isolation, Operating Temp. -40to+100°C

型名	入力電圧(V) (入力電圧幅 V)	出力電圧(V)	出力電流(mA)	効率(%)	負荷変動率	リップルノイズ
2A3TI-0512D	5 (4.5-9)	±12	±125	75-85	±0.6% Typ	50mVp-p max
2A3TI-0515D		±15	±100	75-86		
2A3TI-1212D	12 (9-18)	±12	±125	75-85		
2A3TI-1215D		±15	±100	75-86		
2A3TI-2412D	24 (18-36)	±12	±125	75-85		
2A3TI-2415D		±15	±100	75-86		
2A3TI-4812D	48 (36-72)	±12	±125	75-85		
2A3TI-4815D		±15	±100	75-86		

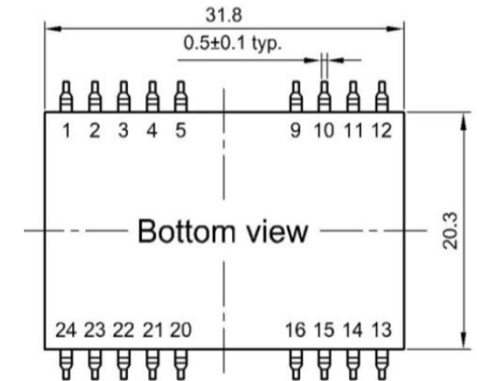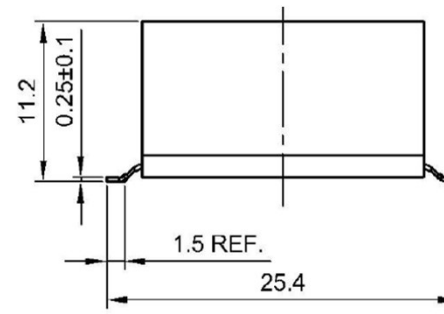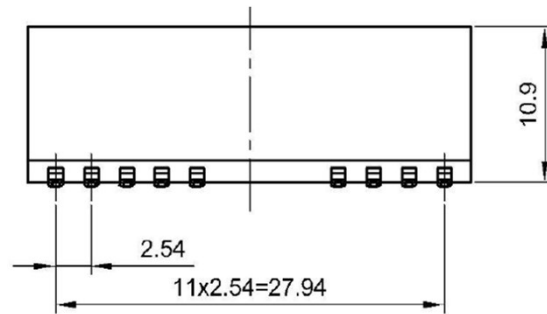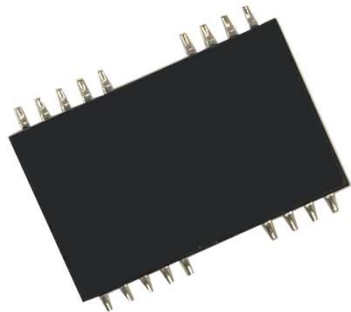

ピン配置: B Pinning

Pin	1	2	3	4	5	6	7	8	9	10	11	12
Single	+Vin	NC	NC	NC	NC	No pin	No pin	No pin	NC	-Vout	+Vout	-Vin
Dual	+Vin	-Vout	COM	NC	NC	No pin	No pin	No pin	NC	COM	+Vout	-Vin
Pin	13	14	15	16	17	18	19	20	21	22	23	24
Single	-Vin	+Vout	-Vout	NC	No pin	No pin	No pin	NC	NC	NC	-Vout	+Vin
Dual	-Vin	+Vout	COM	NC	No pin	No pin	No pin	NC	NC	COM	-Vout	+Vin