



# 2:1 Input Range 2A8TL Series

8Watt SMD24 Package Dual Output, 2kVDC Isolation, Operating Temp. -40to+85°C

型名	入力電圧(V) (入力電圧幅 V)	出力電圧(V)	出力電流(mA)	効率(%)	負荷変動率	リップルノイズ
2A8TL-2415D	24 (18-36)	±15	±267	86	±1.2% max	50mVp-p max

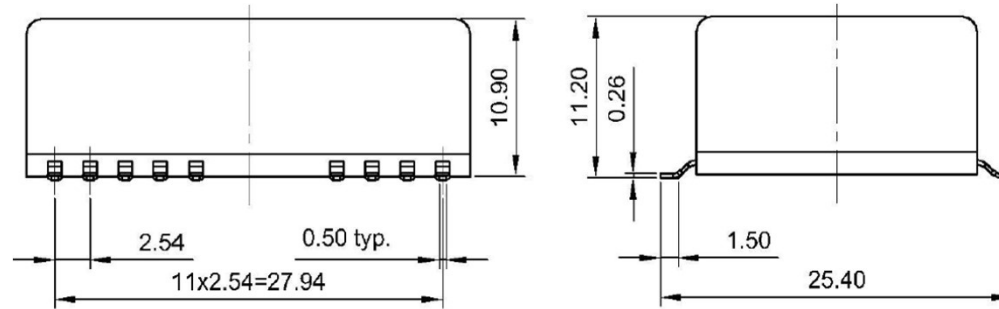

## Single Output :Option

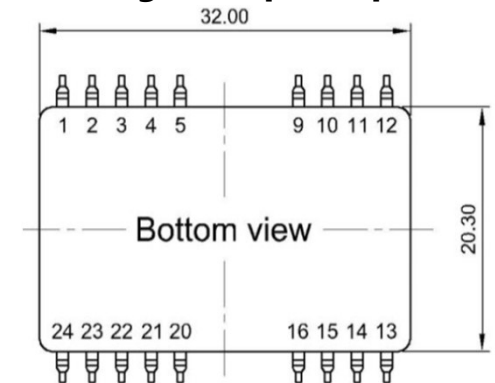

## ピン配置:A Pinning

Pin	1	2	3	4	5	6	7	8	9	10	11	12
Dual	CTRL	-Vin	-Vin	No pin	No pin	No pin	No pin	No pin	COM	NC	-Vout	NC

Pin	13	14	15	16	17	18	19	20	21	22	23	24
Dual	NC	+Vout	NC	COM	No pin	No pin	No pin	NC	NC	+Vin	+Vin	NC