
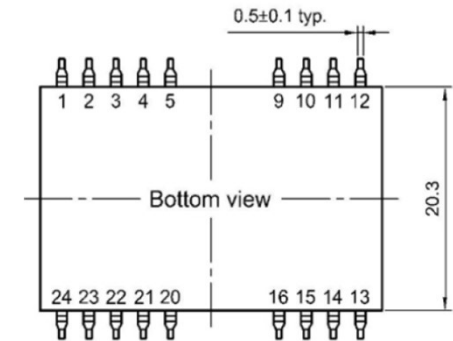
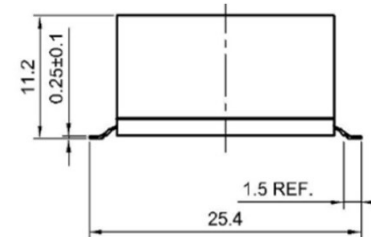
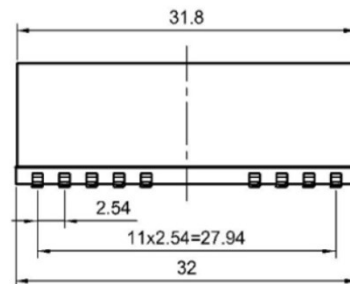


2:1 Input Range 2M6TL Series

6Watt SMD24 Package Dual Output, 6kVDC Isolation, Operating Temp. -40to+75°C, 2MOPP Application

型名	入力電圧(V) (入力電圧幅 V)	出力電圧(V)	出力電流(mA)	効率(%)	負荷変動率	リップルノイズ
2M6TL-2415D	24 (18-36)	±15	±200	84	±0.5% max	150mVp-p max



ピン配置:A Pinning

CTRL*:Option

Pin	1	2	3	4	5	6	7	8	9	10	11	12
Dual	CTRL*	-Vin	NC	No pin	No pin	No pin	No pin	No pin	COM	NC	-Vout	NC
Pin	13	14	15	16	17	18	19	20	21	22	23	24
Dual	NC	+Vout	NC	COM	No pin	No pin	No pin	NC	NC	+Vin	+Vin	NC