
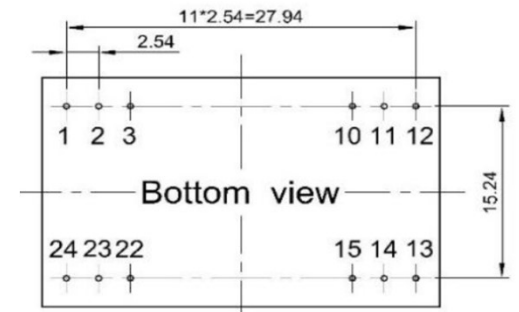



4:1 Input Range 4A2.2DI Series

2.2Watt DIP24 Package Single Output, 1kVDC Isolation, Operating Temp. -40to+100°C

型名	入力電圧(V) (入力電圧幅 V)	出力電圧(V)	出力電流(mA)	効率(%)	負荷変動率	リップルノイズ
4A2.2DI-243.3	24 (9-36)	3.3	600	76-77	±0.6% max	50mVp-p max
4A2.2DI-2405		5	440	78-79		
4A2.2DI-2409		9	244	82-83		
4A2.2DI-2412		12	184	84-85		
4A2.2DI-2415		15	147	84-85		
4A2.2DI-483.3	48 (18-72)	3.3	600	76-77		
4A2.2DI-4805		5	440	78-79		
4A2.2DI-4809		9	244	82-83		
4A2.2DI-4812		12	184	84-85		
4A2.2DI-4815		15	147	84-85		

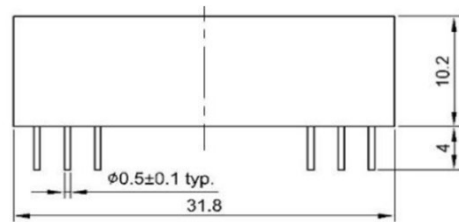

ピン配置:B Pinning

Pin	1	2	3	4	5	6	7	8	9	10	11	12
Single	+Vin	NC	NC	No pin	No pin	No pin	No pin	No pin	No pin	-Vout	+Vout	-Vin

Pin	13	14	15	16	17	18	19	20	21	22	23	24
Single	-Vin	+Vout	-Vout	No pin	No pin	No pin	No pin	No pin	No pin	NC	NC	+Vin