




# 4:1 Input Range 4A60DJ Series

60Watt 2x1" DIP Package Single Output, 1.6kVDC Isolation, Operating Temp. -40to+105°C

型名	入力電圧(V) (入力電圧幅 V)	出力電圧(V)	出力電流(mA)	効率(%)	負荷変動率	リップルノイズ
4A60DJ-2405	24 (9-36)	5	12000	90	±0.5% max	125mVp-p max
4A60DJ-2412		12	5000	90		
4A60DJ-2415		15	4000	91		
4A60DJ-2424		24	2500	91		
4A60DJ-4805	48 (18-75)	5	8000	91		125mVp-p max
4A60DJ-4812		12	5000	92		
4A60DJ-4824		24	2500	92	200mVp-p max	

# 60Watt 2x1" DIP Package Dual Output, 1.6kVDC Isolation, Operating Temp. -40to+105°C

型名	入力電圧(V) (入力電圧幅 V)	出力電圧(V)	出力電流(mA)	効率(%)	負荷変動率	リップルノイズ
4A60DJ-2412D	24 (9-36)	±12	±1666	91	±0.5% max	125mVp-p max
4A60DJ-4812D	48 (18-75)	±12	±1666	90		

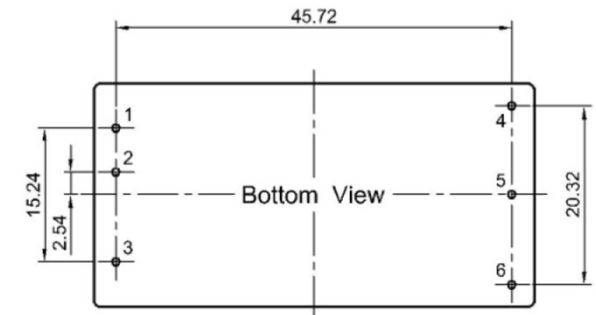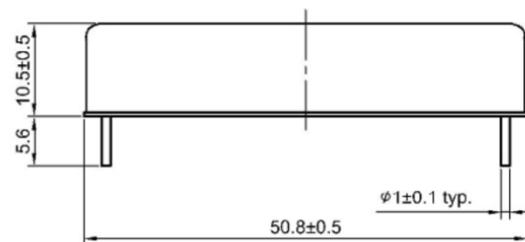

ピン配置

Pin	1	2	3	4	5	6
<b>Single</b>	+Vin	-Vin	CTRL	+Vout	-Vout	Trim
<b>Dual</b>	+Vin	-Vin	CTRL	+Vout	COM	-Vout