
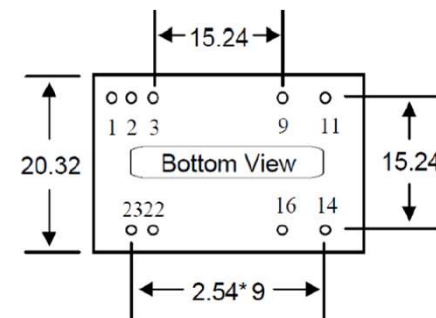



4:1 Input Range 4A8DL Series

8Watt DIP24 Package Single Output, 2kVDC Isolation, Operating Temp. -40to +100°C

型名	入力電圧(V) (入力電圧幅 V)	出力電圧(V)	出力電流(mA)	効率(%)	負荷変動率	リップルノイズ
4A8DL-243.3	24 (9-36)	3.3	1600	84	±1% max	50mVp-p max
4A8DL-2405		5	1600	86		
4A8DL-2412		12	666	85		
4A8DL-2415		15	533	85		
4A8DL-483.3	48 (18-75)	3.3	1600	84		
4A8DL-4805		5	1600	86		
4A8DL-4812		12	666	85		
4A8DL-4815		15	533	85		

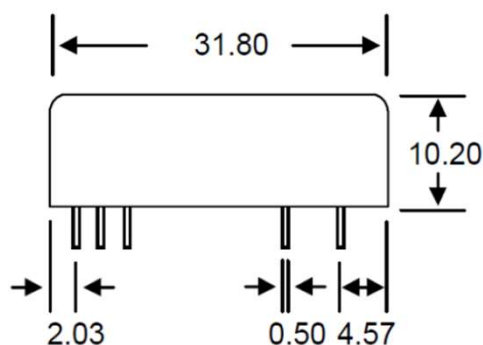

ピン配置:A Pinning




Pin	1	2	3	4	5	6	7	8	9	10	11	12
Single	CTRL	-Vin	-Vin	No pin	No pin	No pin	No pin	No pin	NC	No pin	NC	No pin

Pin	13	14	15	16	17	18	19	20	21	22	23	24
Single	No pin	+Vout	No pin	-Vout	No pin	No pin	No pin	No pin	No pin	+Vin	+Vin	No pin

4:1 Input Range 4A8DL Series

8Watt DIP24 Package Dual Output, 2kVDC Isolation, Operating Temp. -40to+100°C

型名	入力電圧(V) (入力電圧幅 V)	出力電圧(V)	出力電流(mA)	効率(%)	負荷変動率	リップルノイズ
4A8DL-2412D	24 (9-36)	±12	±333	85	±2% max	50mVp-p max
4A8DL-4812D	48 (18-75)					

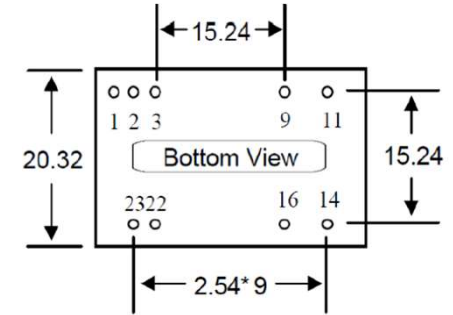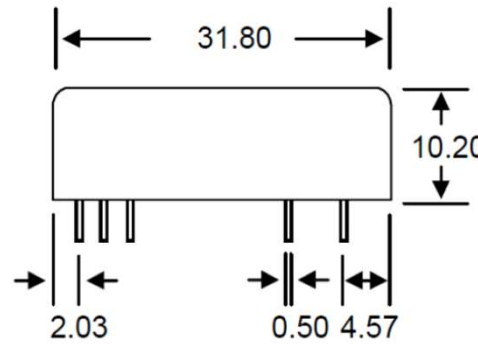

ピン配置:A Pinning

CTRL*:Option

Pin	1	2	3	4	5	6	7	8	9	10	11	12
Dual	CTRL*	-Vin	-Vin	No pin	No pin	No pin	No pin	No pin	NC	No pin	-Vout	No pin
Pin	13	14	15	16	17	18	19	20	21	22	23	24
Dual	No pin	+Vout	No pin	COM	No pin	No pin	No pin	No pin	No pin	+Vin	+Vin	No pin