


8:1 Input Range 8A150DQ Series

150Watt Half Brick Package Single Output, 3kVDC Isolation,
Operating Temp. -40 to +105°C

型名	入力電圧(V) (入力電圧幅 V)	出力電圧(V)	出力電流(mA)	効率(%)	負荷変動率	リップルノイズ
8A150DQ-4812	48 (9-75)	12	12500	89.5	±0.5% max	120mVp-p max
8A150DQ-4824		24	6250	88.5		240mVp-p max

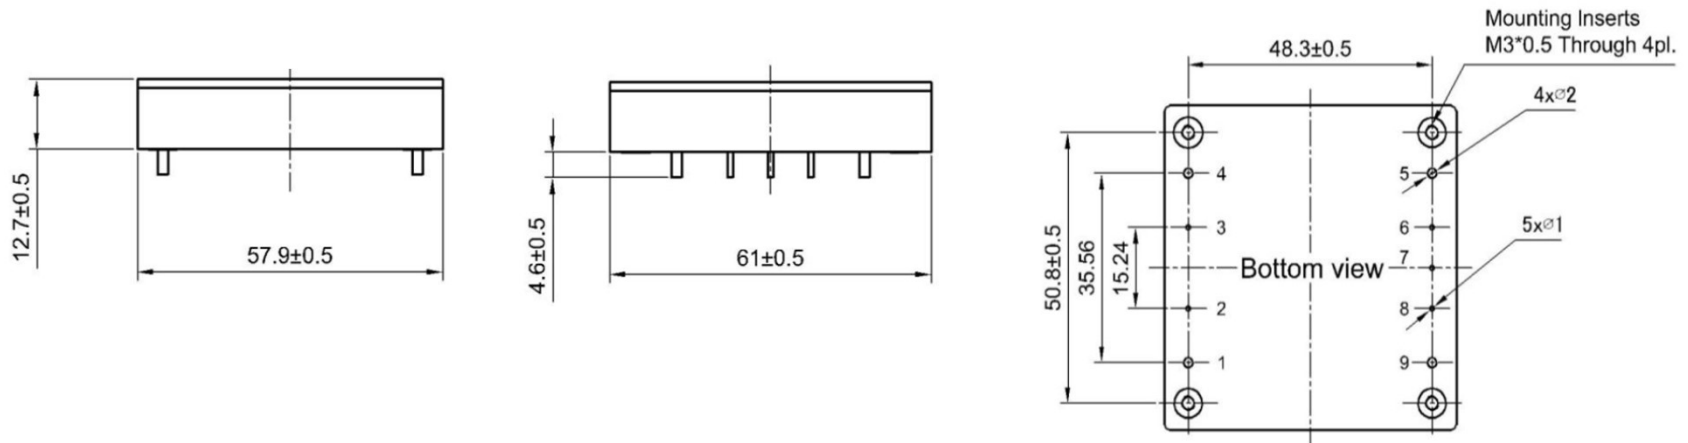




ピン配置

Pin	1	2	3	4	5	6	7	8	9
Single	+Vin	Remote	Case	-Vin	-Vout	-S	Trim	+S	+Vout

12:1 Input Range 12A60DP Series

60Watt Quarter Brick Package Single Output, 3kVDC Isolation,
Operating Temp. -40to+110°C, Compliance to EN50155 Railway Standard

型名	入力電圧(V) (入力電圧幅 V)	出力電圧(V)	出力電流(mA)	効率(%)	負荷変動率	リップルノイズ
12A60DP-11005	110 (14-160)	5	12000	88	±0.2% max	150mVp-p
12A60DP-11012		12	5000	89		
12A60DP-11024		24	2500	88		
12A60DP-11048		48	1250	88		

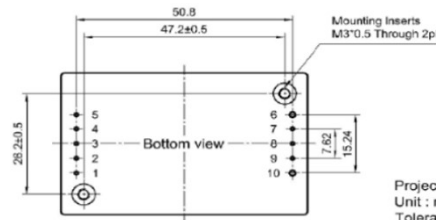

Projection : Third angle projection
Unit : mm
Tolerance : ±0.25mm

ピン配置

Pin	1	2	3	4	5	6	7	8	9	10
Single	+Vin	UVLD	CTRL	Vbus	-Vin	-Vout	-S	Trim	+s	+Vout