

# 1:1 Input Range A1DDL Series



1Watt DIP8 Package Single Output, 1kVDC Isolation, Operating Temp. -40to+100°C

型名	入力電圧(V)	出力電圧(V)	出力電流(mA)	効率(%)	負荷変動率	リップルノイズ
A1DDL-3.33.3	3.3	3.3	303	73-77	15% max	75mVp-p max
A1DDL-3.305		5	200	68-78	15% max	
A1DDL-3.309		9	112	78-81	10% max	
A1DDL-3.312		12	84	78-81	10% max	
A1DDL-3.315		15	67	79-82	10% max	
A1DDL-053.3	5	3.3	303	73-77	15% max	
A1DDL-0505		5	200	68-78	15% max	
A1DDL-0509		9	112	78-81	10% max	
A1DDL-0512		12	84	78-81	10% max	
A1DDL-0515		15	67	79-82	10% max	
A1DDL-123.3	12	3.3	303	73-77	15% max	
A1DDL-1205		5	200	68-78	15% max	
A1DDL-1209		9	112	78-81	10% max	
A1DDL-1212		12	84	78-81	10% max	
A1DDL-1215		15	67	79-82	10% max	
A1DDL-243.3	24	3.3	303	73-77	15% max	
A1DDL-2405		5	200	68-78	15% max	
A1DDL-2409		9	112	78-81	10% max	
A1DDL-2412		12	84	78-81	10% max	
A1DDL-2415		15	67	79-82	10% max	

# 1:1 Input Range

# A1DDL Series

## 1Watt DIP8 Package

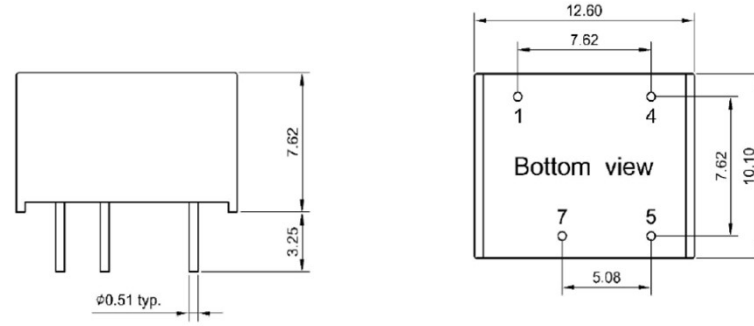

### ピン配置

Pin	1	2	3	4	5	6	7	8
Single	-Vin	No Pin	No Pin	+Vin	+Vout	No Pin	-Vout	No Pin