
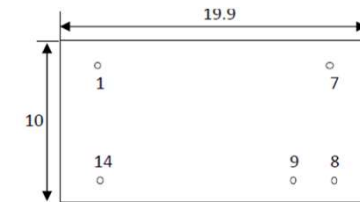



1:1 Input Range A2DG Series

2Watt DIP14 Package Single Output, 2kVDC Isolation, Operating Temp. -40to+100°C

型名	入力電圧(V)	出力電圧(V)	出力電流(mA)	効率(%)	負荷変動率	リップルノイズ
A2DG-2405AK4	24	5	400	83.5	15% max	150mVp-p max

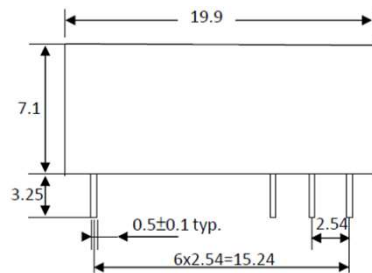

ピン配置

Pin	1	2	3	4	5	6	7	8	9	10	11	12	13	14
Single	-Vin	No pin	No pin	No pin	No pin	No pin	NC	-Vout	+Vout	No pin	No pin	No pin	No pin	+Vin