
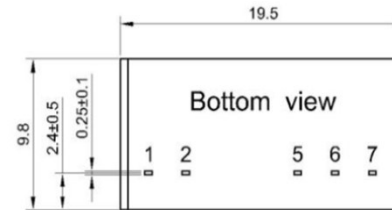


1:1 Input Range A2SC-K5 Series

2Watt SIP7 Package Bipolar Output, 5.2kVDC Isolation, Operating Temp. -40to+95°C

型名	入力電圧(V)	出力電圧1(V)	出力電流1(mA)	出力電圧2(V)	出力電流2(mA)
A2SC-241505K5	24	15	66/107	-5	-200/-80
A2SC-242005K5		20	50/80	-5	-200/-80

型名	効率1(%)	効率2(%)	負荷変動率	リップルノイズ
A2SC-241505K5	81-84	82-85	10% max	200mVp-p max
A2SC-242005K5	81-84	82-85	10% max	200mVp-p max

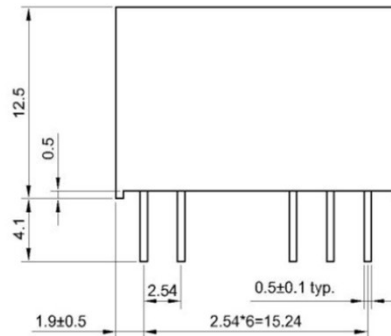

ピン配置

Pin	1	2	3	4	5	6	7
Bipolar	+Vin	-Vin	No pin	No pin	-Vout	COM	+Vout