

2:1 Input Range

2A2SD-K2 Series



2Watt SIP8 Package Single Output, 2kVDC Isolation, Operating Temp. -40to+85°C

型名	入力電圧(V) (入力電圧幅 V)	出力電圧(V)	出力電流(mA)	効率(%)	負荷変動率	リップルノイズ
2A2SD-053.3K2	5 (4.5-9)	3.3	500	68-70	±0.5% Typ	50mVp-p max
2A2SD-0505K2		5	400	73-78		
2A2SD-0512K2		12	166	75-81		
2A2SD-0515K2		15	134	75-82		
2A2SD-123.3K2	12 (9-18)	3.3	500	68-70		
2A2SD-1205K2		5	400	73-78		
2A2SD-1212K2		12	166	75-81		
2A2SD-1215K2		15	134	75-82		
2A2SD-243.3K2	24 (18-36)	3.3	500	68-70		
2A2SD-2405K2		5	400	73-78		
2A2SD-2412K2		12	166	75-81		
2A2SD-2415K2		15	134	75-82		
2A2SD-483.3K2	48 (36-72)	3.3	500	68-70		
2A2SD-4805K2		5	400	73-78		
2A2SD-4812K2		12	166	75-81		
2A2SD-4815K2		15	134	75-82		

2:1 Input Range 2A2SD-K2 Series

2Watt SIP8 Package Dual Output, 2kVDC Isolation, Operating Temp. -40to+85°C

型名	入力電圧(V) (入力電圧幅 V)	出力電圧(V)	出力電流(mA)	効率(%)	負荷変動率	リップルノイズ
2A2SD-053.3DK2	5 (4.5-9)	±3.3	±250	68-70	±0.5% Typ	50mVp-p max
2A2SD-0505DK2		±5	±200	73-78		
2A2SD-0512DK2		±12	±83	75-81		
2A2SD-123.3DK2	12 (9-18)	±3.3	±250	68-70		
2A2SD-1205DK2		±5	±200	73-78		
2A2SD-1212DK2		±12	±83	75-81		
2A2SD-243.3DK2	24 (18-36)	±3.3	±250	68-70		
2A2SD-2405DK2		±5	±200	73-78		
2A2SD-2412DK2		±12	±83	75-81		
2A2SD-483.3DK2	48 (36-72)	±3.3	±250	68-70		
2A2SD-4805DK2		±5	±200	73-78		
2A2SD-4812DK2		±12	±83	75-81		

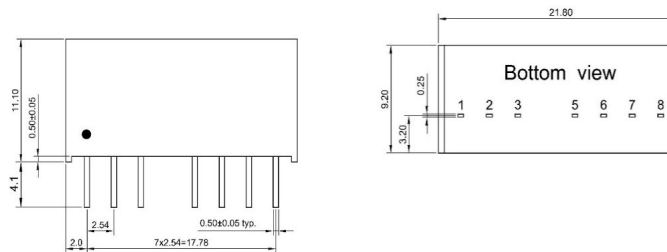

ピン配置

Pin	1	2	3	4	5	6	7	8
Single	-Vin	+Vin	CTRL	No pin	NC	+Vout	-Vout	NC
Dual	-Vin	+Vin	CTRL	No pin	NC	+Vout	COM	-Vout