




# 2:1 Input Range 2A5TL Series

5Watt SMD24 Package Dual Output, 2kVDC Isolation, Operating Temp. -40to+95°C

型名	入力電圧(V) (入力電圧幅 V)	出力電圧(V)	出力電流(mA)	効率(%)	負荷変動率	リップルノイズ
2A5TL-0505D	5 (4.5-9)	±5	±500	76-81	±0.6% Typ	50mVp-p max
2A5TL-0509D		±9	±278	76-84		
2A5TL-0512D		±12	±210	76-84		
2A5TL-0515D		±15	±170	77-85		
2A5TL-1205D	12 (9-18)	±5	±500	76-81		
2A5TL-1209D		±9	±278	76-84		
2A5TL-1212D		±12	±210	76-84		
2A5TL-1215D		±15	±170	77-85		
2A5TL-2405D	24 (18-36)	±5	±500	76-81		
2A5TL-2409D		±9	±278	76-84		
2A5TL-2412D		±12	±210	76-84		
2A5TL-2415D		±15	±170	77-85		
2A5TL-4805D	48 (36-72)	±5	±500	76-81		
2A5TL-4809D		±9	±278	76-84		
2A5TL-4812D		±12	±210	76-84		
2A5TL-4815D		±15	±170	77-85		

# 2:1 Input Range      2A5TL Series

## 5Watt SMD24 Package Single/Dual Output

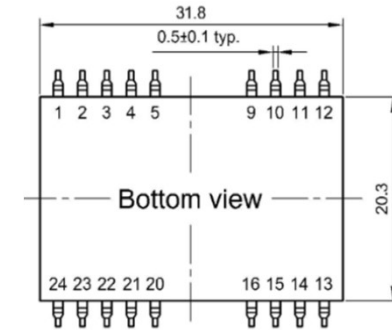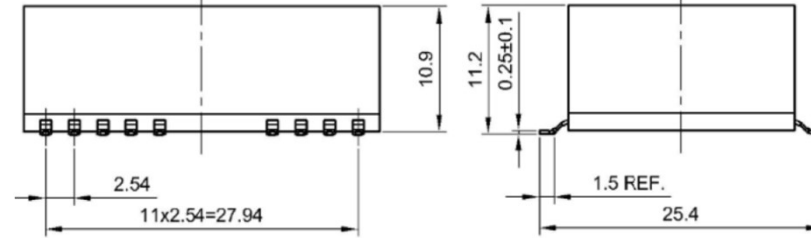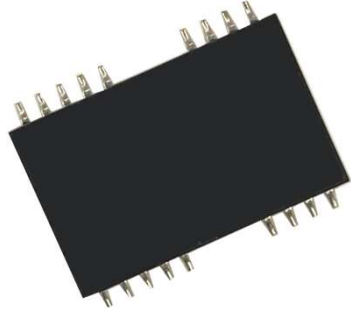

### ピン配置:A Pinning

### CTRL\*:Option

Pin	1	2	3	4	5	6	7	8	9	10	11	12
<b>Single</b>	CTRL*	-Vin	-Vin	NC	NC	No pin	No pin	No pin	NC	NC	NC	NC
<b>Dual</b>	CTRL*	-Vin	-Vin	No pin	No pin	No pin	No pin	No pin	COM	NC	-Vout	NC

Pin	13	14	15	16	17	18	19	20	21	22	23	24
<b>Single</b>	NC	+Vout	NC	-Vout	No pin	No pin	No pin	NC	NC	+Vin	+Vin	NC
<b>Dual</b>	NC	+Vout	NC	COM	No pin	No pin	No pin	NC	NC	+Vin	+Vin	NC