

4:1 Input Range 4A10DJ Series

10Watt 2x1" DIP Package Single Output, 2kVDC Isolation,
Operating Temp. -40 to +90°C




型名	入力電圧(V) (入力電圧幅 V)	出力電圧(V)	出力電流(mA)	効率(%)	負荷変動率	リップルノイズ		
4A10DJ-243.3	24 (9-36)	3.3	2000	84	±0.5% max	100mVp-p max		
4A10DJ-2405		5	2000	86				
4A10DJ-2412		12	833	85				
4A10DJ-2415		15	667	85				
4A10DJ-483.3	48 (18-75)	3.3	2000	84			±0.5% max	100mVp-p max
4A10DJ-4805		5	2000	86				
4A10DJ-4812		12	833	85				
4A10DJ-4815		15	667	85				

10Watt 2x1" DIP Package Dual Output, 2kVDC Isolation,
Operating Temp. -40 to +90°C

型名	入力電圧(V) (入力電圧幅 V)	出力電圧(V)	出力電流(mA)	効率(%)	負荷変動率	リップルノイズ		
4A10DJ-2405D	24 (9-36)	±5	±1000	82	±1.2% max	100mVp-p max		
4A10DJ-2412D		±12	±416	86				
4A10DJ-2415D		±15	±333	85				
4A10DJ-4805D	48 (18-75)	±5	±1000	82			±1.2% max	100mVp-p max
4A10DJ-4812D		±12	±416	85				
4A10DJ-4815D		±15	±333	86				

4:1 Input Range 4A10DJ Series

10Watt 2x1" DIP Package Single/Dual Output

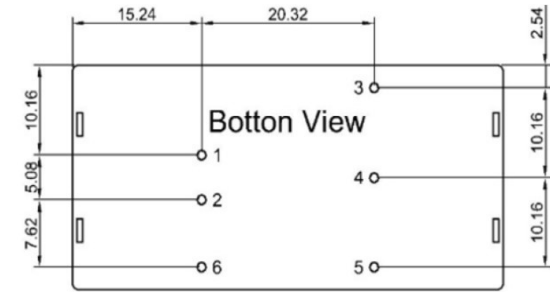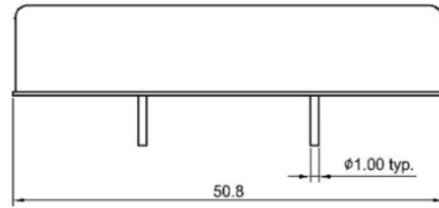

ピン配置

Pin	1	2	3	4	5	6
Single	+Vin	-Vin	+Vout	NC	-Vout	CTRL
Dual	+Vin	-Vin	+Vout	COM	-Vout	CTRL