
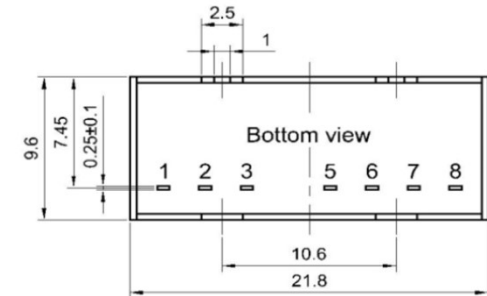




# 4:1 Input Range 4A12SD-K3 Series

12Watt SIP8 Package Single Output, 3kVDC Isolation,  
Operating Temp. -40 to +105°C

型名	入力電圧(V) (入力電圧幅 V)	出力電圧(V)	出力電流(mA)	効率(%)	負荷変動率	リップルノイズ
4A12SD-243.3K3	24 (9-36)	3.3	2400	85	±0.5% Typ	50mVp-p max
4A12SD-2405K3		5	2400	88		
4A12SD-2412K3		12	1000	88		
4A12SD-2424K3		24	500	88		
4A12SD-4805K3	48 (18-75)	5	2400	87		50mVp-p max



## ピン配置

Pin	1	2	3	4	5	6	7	8
Single	-Vin	+Vin	CTRL	No pin	Trim	+Vout	-Vout	NC