


4:1 Input Range 4A300DQ Series

300Watt Half Brick Package Single Output, 3kVDC Isolation,
Operating Temp. -40to +100°C

型名	入力電圧(V) (入力電圧幅 V)	出力電圧(V)	出力電流(mA)	効率(%)	負荷変動率	リップルノイズ
4A300DQ-2412	24 (9-36)	12	25000	86.5	±0.5% max	120mVp-p max
4A300DQ-2415		15	20000	87		150mVp-p max
4A300DQ-2424		24	12500	86		300mVp-p max
4A300DQ-2448		48	6250	87		480mVp-p max

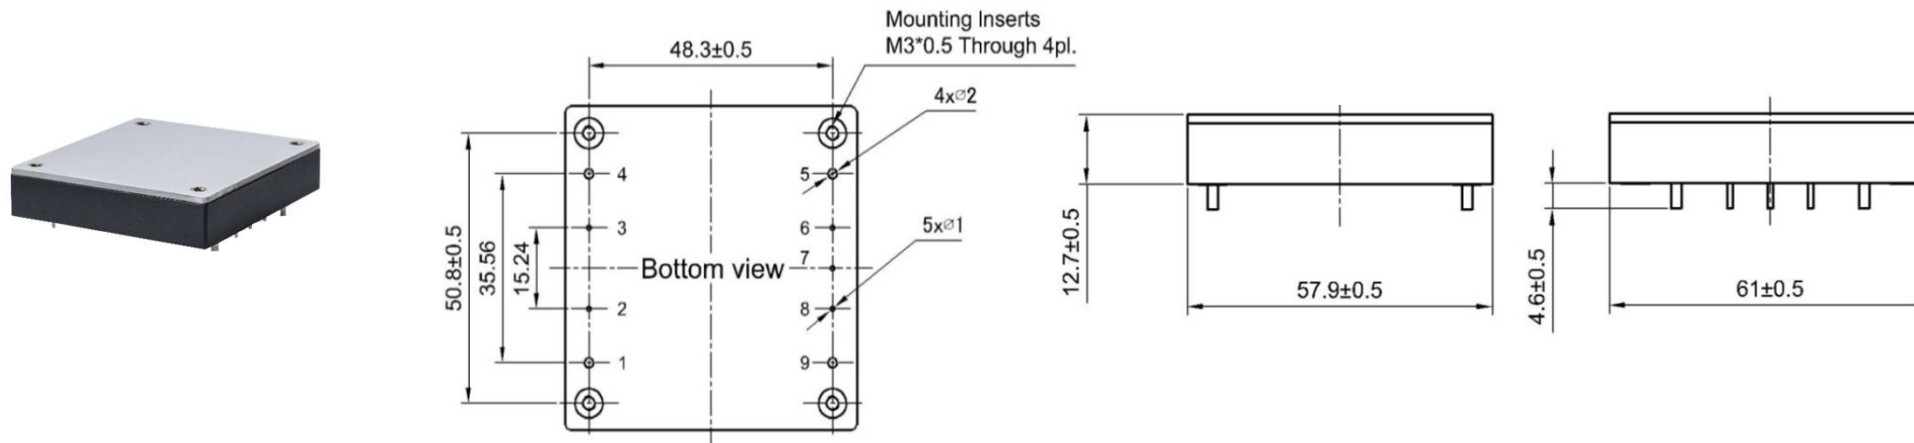

ピン配置

Pin	1	2	3	4	5	6	7	8	9
Single	+Vin	Remote On/Off	Case	-Vin	-Vout	-Sense	Trim	+Sense	+Vout