


# 12:1 Input Range 12A150DP Series

150Watt Quarter Brick Package Single Output, 3kVAC Isolation,  
Operating Temp. -40to+105°C

型名	入力電圧(V) (入力電圧幅 V)	出力電圧(V)	出力電流(mA)	効率(%)	負荷変動率	リップルノイズ
12A150DP-11012	110 (14-160)	12	12500	88.5	±0.2% max	200mVp-p
12A150DP-11024		24	6250	87.5		240mVp-p
12A150DP-11048		48	3125	87.5		480mVp-p
12A150DP-11054		54	2778	87.5		540mVp-p

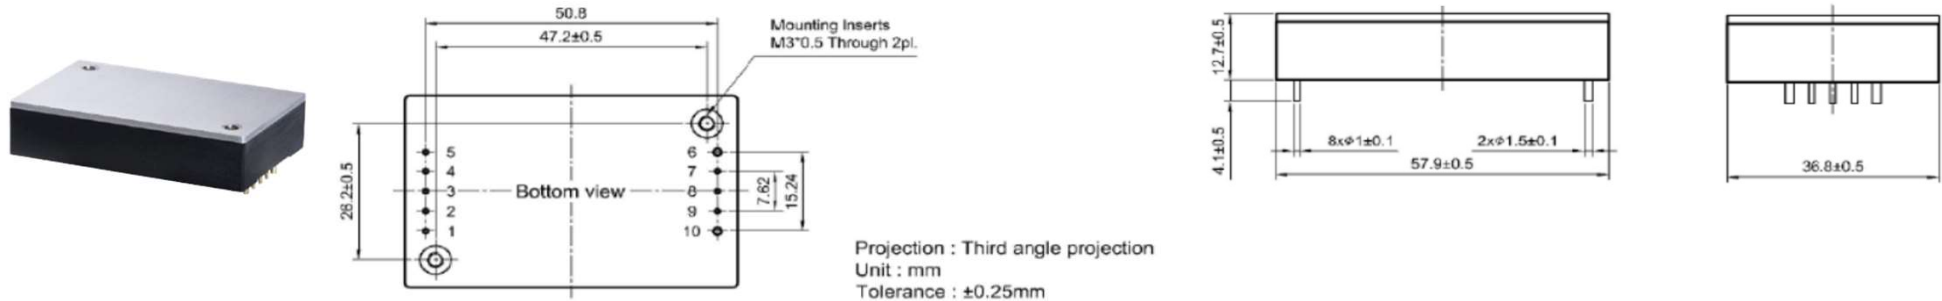

## ピン配置

Pin	1	2	3	4	5	6	7	8
Single	+Vin	Remote On/Off	-Vin	-Vout	-Sense	Trim	+Sense	+Vout