


12:1 Input Range

12A60DP Series

60Watt Quarter Brick Package Single Output,3kVDC Isolation,

Operating Temp.-40to+110°C

型名	入力電圧(V) (入力電圧幅 V)	出力電圧(V)	出力電流(mA)	効率(%)	負荷変動率	リップルノイズ
12A60DP-11005	110 (14-160)	5	12000	88	±0.2% max	150mVp-p
12A60DP-11012		12	5000	89		
12A60DP-11024		24	2500	88		
12A60DP-11048		48	12500	88		

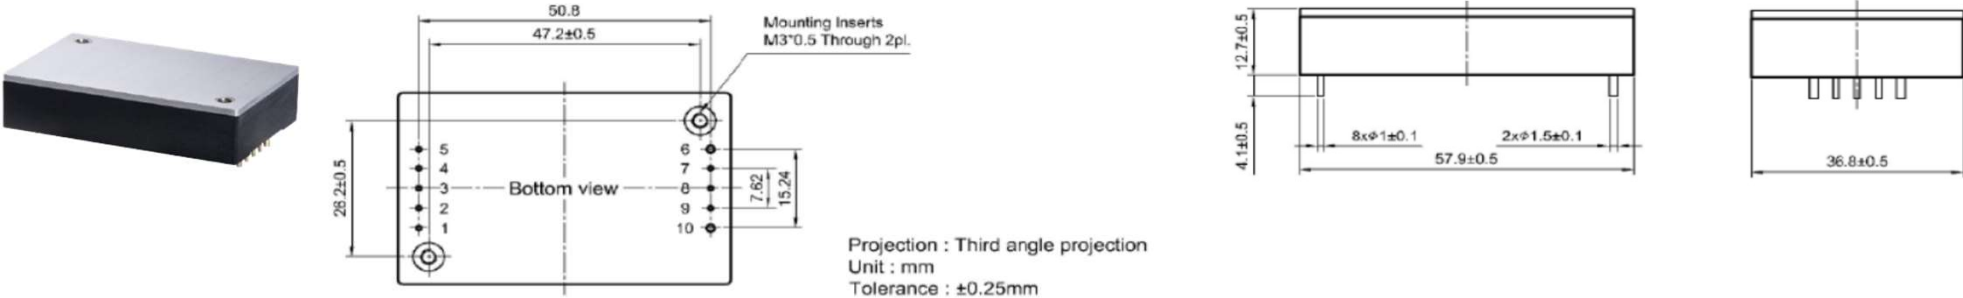

ピン配置

Pin	1	2	3	4	5	6	7	8
Single	+Vin	Remote On/Off	-Vin	-Vout	-Sense	Trim	+Sense	+Vout