


8:1 Input Range 8A150DP Series

**150Watt Quarter Brick Package Single Output,2.25kVDC Isolation,
OperatingTemp.40to+105°C**

型名	入力電圧(V) (入力電圧幅 V)	出力電圧(V)	出力電流(mA)	効率(%)	負荷変動率	リップルノイズ
8A150DP-4805	48 (9-75)	5	20000	87	±0.5% max	120mVp-p max
8A150DP-4812		12	12500	89		150mVp-p max
8A150DP-4815		15	10000	89		150mVp-p max
8A150DP-4824		24	6250	86		240mVp-p max
8A150DP-4848		48	3125	87		480mVp-p max

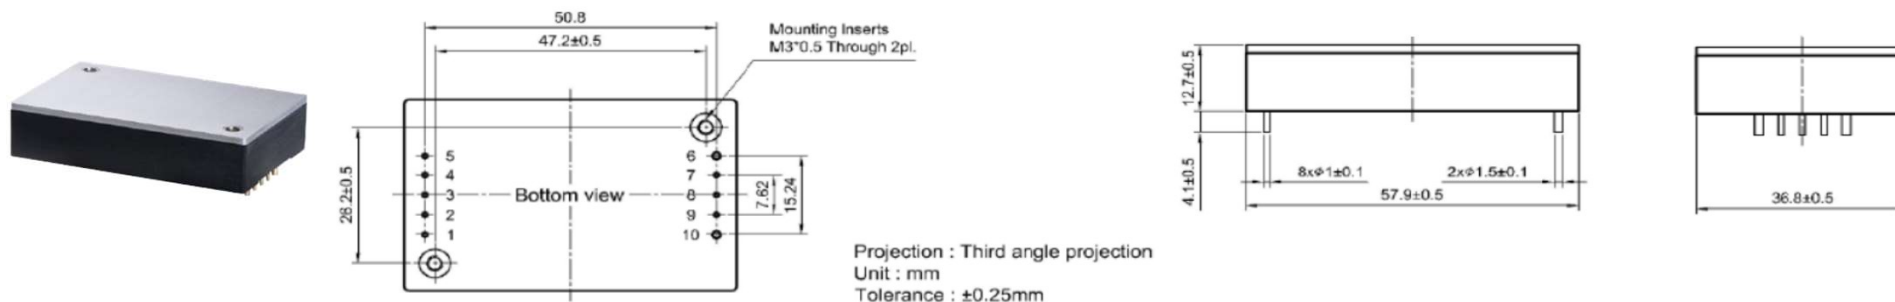

ピン配置

Pin	1	2	3	4	5	6	7	8
Single	+Vin	Remote On/Off	-Vin	-Vout	-Sense	Trim	+Sense	+Vout