


# 8:1 Input Range 8A150DQ Series

150Watt Half Brick Package Single Output, 3kVDC Isolation,  
Operating Temp. -40 to +105°C

型名	入力電圧(V) (入力電圧幅 V)	出力電圧(V)	出力電流(mA)	効率(%)	負荷変動率	リップルノイズ
8A150DQ-4812	48 (9-75)	12	12500	89.5	±0.5% max	120mVp-p max
8A150DQ-4824		24	6250	88.5		240mVp-p max

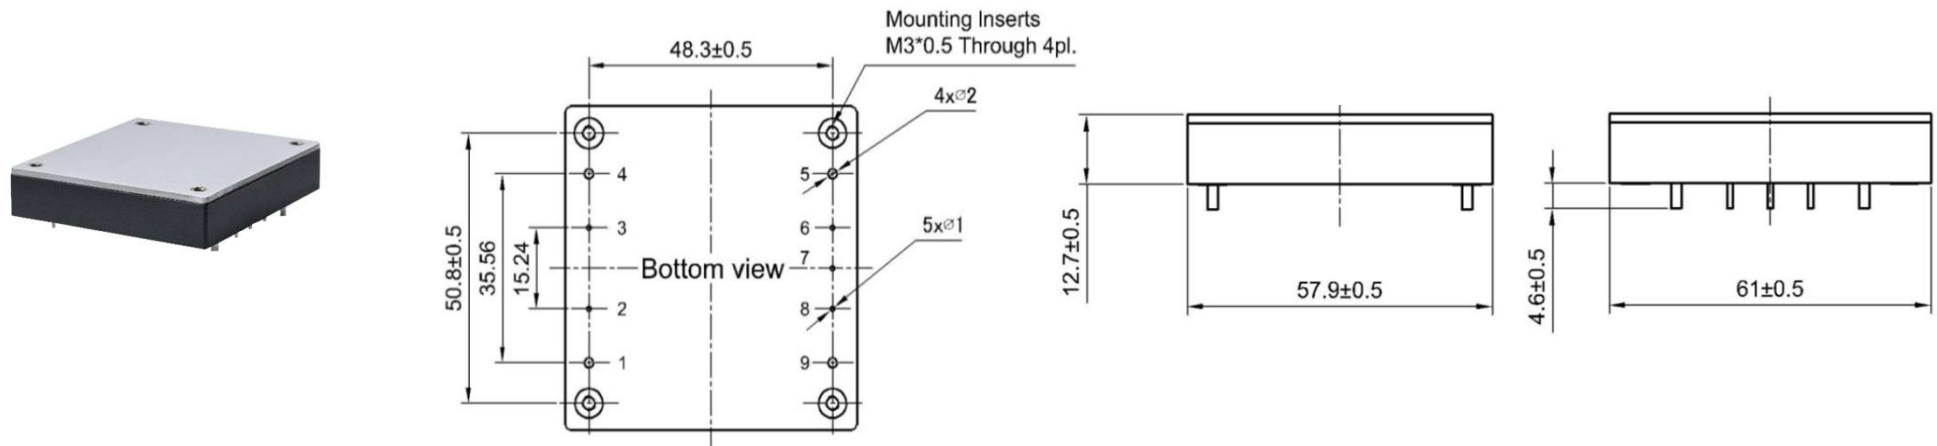

## ピン配置

Pin	1	2	3	4	5	6	7	8	9
Single	+Vin	Remote On/Off	Case	-Vin	-Vout	-Sense	Trim	+Sense	+Vout