


2:1 Input Range

2A20DJM Series

5kVAC isolation for 60 sec

20Watt DIP 2x1" Package Single Output,5kVAC Isolation, Operating Temp.-40to+ 100°C


型名	入力電圧(V) (入力電圧幅 V)	出力電圧(V)	出力電流(mA)	効率(%)	負荷変動率	リップルノイズ
2A20DJM-1205	12 (9-18)	5	4000	86	±0.5% Max.	60mVp-p Max.
2A20DJM-1212		12	1670	89		
2A20DJM-1215		15	1333	88		
2A20DJM-1224		24	840	89		
2A20DJM-2405	24 (18-36)	5	4000	87		
2A20DJM-2412		12	1670	89		
2A20DJM-2415		15	1333	88		
2A20DJM-2424		24	840	89		
2A20DJM-4805	48 (36-75)	5	4000	87		
2A20DJM-4812		12	1670	89		
2A20DJM-4815		15	1333	88		
2A20DJM-4824		24	840	90		

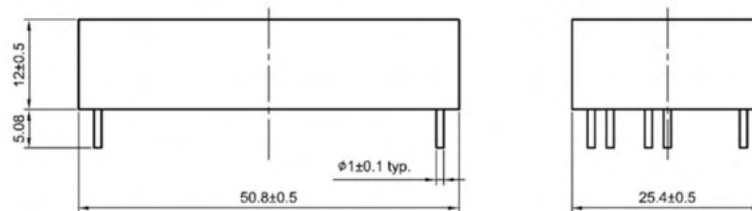

Medical safety 2xMOPP per 3rd Edition of IEC/EN 60601-1

Case material : Plastic

寸法(WxHxD)
50.8x12x25.4

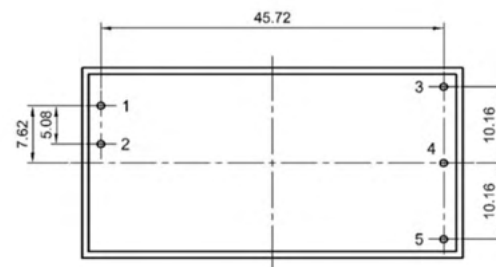

ピン配置

Pin	1	2	3	4	5
Single	+Vin	-Vin	+Vout	No pin	-Vout