

4:1 Input Range

4A40DO Series

2kVDC isolation for 60 sec

40Watt 1x1" Package Single Output,2kVDC Isolation, Operating Temp.-40to+105°C

型名	入力電圧(V) (入力電圧幅 V)	出力電圧(V)	出力電流(mA)	効率(%)	負荷変動率	リップルノイズ
4A40DO-243.3	24 (9-36)	3.3	10000	86-87	±0.5% Max.	75mVp-p Max.
4A40DO-2405		5	8000	88		
4A40DO-2412		12	3333	88-89		
4A40DO-2415		15	2667	88		
4A40DO-2424		24	1667	88-89		
4A40DO-483.3	48 (18-75)	3.3	10000	86-87		
4A40DO-4805		5	8000	88		
4A40DO-4812		12	3333	88-89		
4A40DO-4815		15	2667	88		
4A40DO-4824		24	1667	88-89		

40Watt 1x1" Package Dual Output,2kVDC Isolation, Operating Temp.-40to+105°C

型名	入力電圧(V) (入力電圧幅 V)	出力電圧(V)	出力電流(mA)	効率(%)	負荷変動率	リップルノイズ
4A40DO-2412D	24 (9-36)	±12	±1667	88	±1.0% Max.	75mVp-p Max.
4A40DO-2415D		±15	±1333	88		
4A40DO-4812D	48 (18-75)	±12	±1667	88		
4A40DO-4815D		±15	±1333	88		

4:1 Input Range


4A40DO Series

2kVDC isolation for 60 sec


40Watt 1x1" Package Single/Dual Output



Case material : Metal

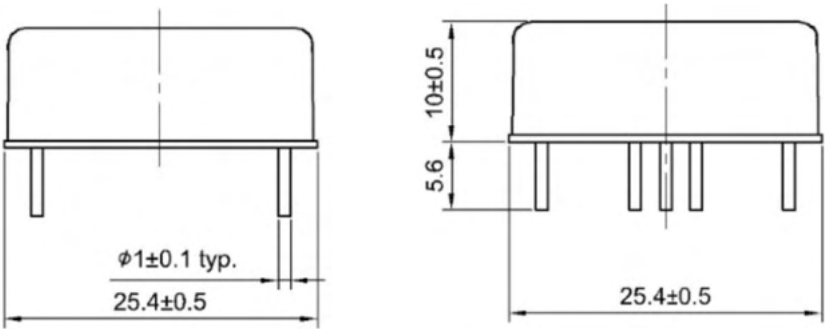

寸法(WxHxD)
25.4x10.5x25.4

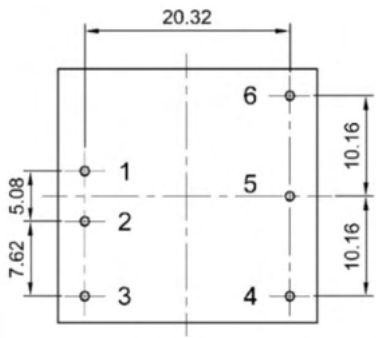

ピン配置

Pin	1	2	3	4	5	6
Single	+Vin	-Vin	CTRL	-Vout	Trim	+Vout
Dual	+Vin	-Vin	CTRL	-Vout	COM	+Vout