

4:1 Input Range

4A60DJM Series

3kVDC isolation for 60 sec

60Watt 2x1" DIP Package Single Output,3kVDC Isolation, Operating Temp.-40to+105°C

Over Load Protection

Over Voltage Protection



Over Temperature Protection

Short Circuit Protection


| 型名            | 入力電圧(V)<br>(入力電圧幅 V) | 出力電圧(V) | 出力電流(mA) | 効率(%) | 負荷変動率      | リップルノイズ       |
|---------------|----------------------|---------|----------|-------|------------|---------------|
| 4A60DJM-11005 | 110<br>(40-160)      | 5       | 12000    | 89    | ±0.5% Typ. | 100mVp-p Max. |
| 4A60DJM-11012 |                      | 12      | 5000     | 90    |            | 150mVp-p Max. |
| 4A60DJM-11024 |                      | 24      | 2500     | 90    |            | 150mVp-p Max. |
| 4A60DJM-11048 |                      | 48      | 1250     | 88.5  |            | 200mVp-p Max. |



Case material : Metal

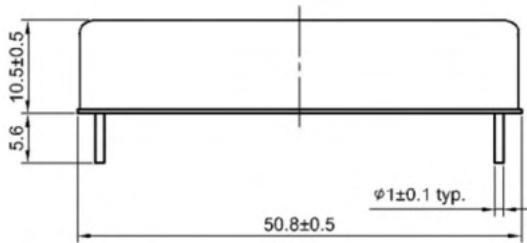

寸法(WxHxD)  
50.8x10.5x25.4

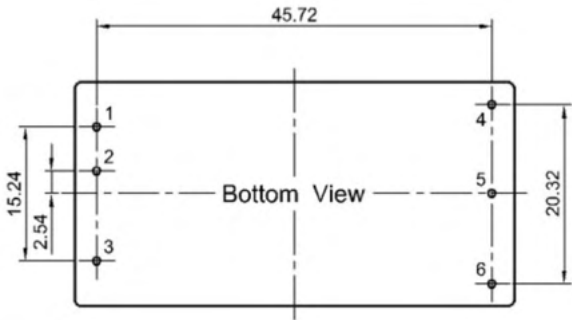

ピン配置

| Pin    | 1    | 2    | 3    | 4     | 5     | 6    |
|--------|------|------|------|-------|-------|------|
| Single | +Vin | -Vin | CTRL | +Vout | -Vout | Trim |