



1:1 Input Range

A3SA Series

1kVDC isolation for 1 sec

3Watt SIP4 Package Single Output, 1kVDC Isolation, Operating Temp. -40to+100°C

型名	入力電圧(V)	出力電圧(V)	出力電流(mA)	効率(%)	負荷変動率	リップルノイズ
A3SA-0505	5	5	600	83	10% Max.	100mVp-p Max.
A3SA-0509		9	344	86	10% Max.	
A3SA-0512		12	250	87	10% Max.	
A3SA-0515		15	200	88	10% Max.	
A3SA-1205	12	5	600	85	10% Max.	
A3SA-1209		9	344	88	10% Max.	
A3SA-1212		12	250	89	10% Max.	
A3SA-1215		15	200	89	10% Max.	
A3SA-1505	15	5	600	85	10% Max.	
A3SA-1509		9	344	88	10% Max.	
A3SA-1512		12	250	88	10% Max.	
A3SA-1515		15	200	88	10% Max.	
A3SA-2405	24	5	600	86	10% Max.	
A3SA-2409		9	344	89	10% Max.	
A3SA-2412		12	250	90	10% Max.	
A3SA-2415		15	200	90	10% Max.	

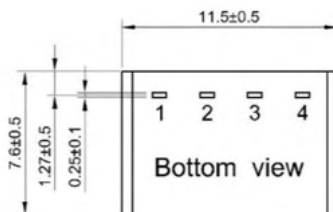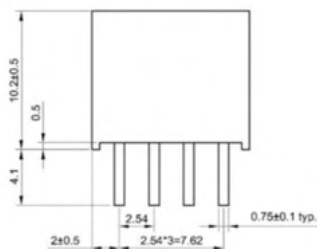

寸法(WxHxD)
11.5x10.2x7.6

ピン配置

Pin	1	2	3	4
Single	-Vin	+Vin	-Vout	+Vout



1:1 Input Range

A3SA Series

2kVDC isolation for 1 sec

3Watt SIP4 Package Single Output, 2kVDC Isolation, Operating Temp. -40to+100°C

型名	入力電圧(V)	出力電圧(V)	出力電流(mA)	効率(%)	負荷変動率	リップルノイズ
A3SA-0505K2	5	5	600	83	10% Max.	100mVp-p Max.
A3SA-0509K2		9	344	86	10% Max.	
A3SA-0512K2		12	250	87	10% Max.	
A3SA-0515K2		15	200	88	10% Max.	
A3SA-1205K2	12	5	600	85	10% Max.	
A3SA-1209K2		9	344	88	10% Max.	
A3SA-1212K2		12	250	89	10% Max.	
A3SA-1215K2		15	200	89	10% Max.	
A3SA-1505K2	15	5	600	85	10% Max.	
A3SA-1509K2		9	344	88	10% Max.	
A3SA-1512K2		12	250	88	10% Max.	
A3SA-1515K2		15	200	88	10% Max.	
A3SA-2405K2	24	5	600	86	10% Max.	
A3SA-2409K2		9	344	89	10% Max.	
A3SA-2412K2		12	250	90	10% Max.	
A3SA-2415K2		15	200	90	10% Max.	

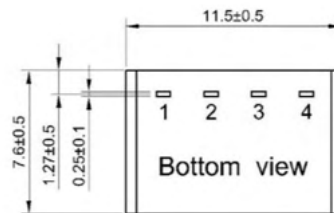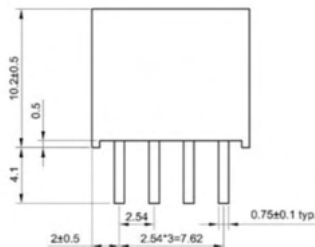

寸法(WxHxD)
11.5x10.2x7.6

ピン配置

Pin	1	2	3	4
Single	-Vin	+Vin	-Vout	+Vout



1:1 Input Range

A3SA Series

3kVDC isolation for 1 sec

3Watt SIP4 Package Single Output, 3kVDC Isolation, Operating Temp. -40to+100°C

型名	入力電圧(V)	出力電圧(V)	出力電流(mA)	効率(%)	負荷変動率	リップルノイズ
A3SA-0505K3	5	5	600	83	10% Max.	100mVp-p Max.
A3SA-0509K3		9	344	86	10% Max.	
A3SA-0512K3		12	250	87	10% Max.	
A3SA-0515K3		15	200	88	10% Max.	
A3SA-1205K3	12	5	600	85	10% Max.	
A3SA-1209K3		9	344	88	10% Max.	
A3SA-1212K3		12	250	89	10% Max.	
A3SA-1215K3		15	200	89	10% Max.	
A3SA-1505K3	15	5	600	85	10% Max.	
A3SA-1509K3		9	344	88	10% Max.	
A3SA-1512K3		12	250	88	10% Max.	
A3SA-1515K3		15	200	88	10% Max.	
A3SA-2405K3	24	5	600	86	10% Max.	
A3SA-2409K3		9	344	89	10% Max.	
A3SA-2412K3		12	250	90	10% Max.	
A3SA-2415K3		15	200	90	10% Max.	

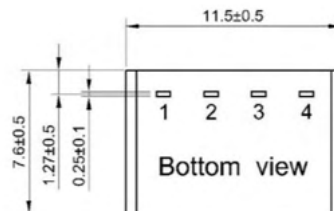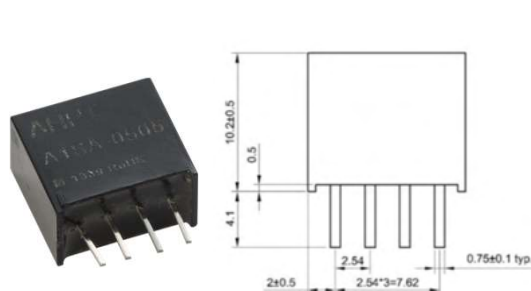

寸法(WxHxD)
11.5x10.2x7.6

ピン配置

Pin	1	2	3	4
Single	-Vin	+Vin	-Vout	+Vout