

12:1 Input Range 12A40DP Series 3kVDC isolation for 60 sec

40Watt 1/4Brick Package Single Output,3kVDC Isolation, Operating Temp.-40to+105℃


Compliance to EN50155 and EN45545-2 railway standard

型名	入力電圧(V) (入力電圧幅 V)	出力電圧(V)	出力電流(mA)	効率(%)	負荷変動率	リップルノイズ
12A40DP-11005	110 (14-160)	5	8000	88	±0.2% Max.	100mVp-p Max.
12A40DP-11012		12	3333	89		150mVp-p Max.
12A40DP-11024		24	1667	88		200mVp-p Max.
12A40DP-11048		48	833	88		300mVp-p Max.
12A40DP-11054		54	741	88		300mVp-p Max.



Case material : Plastic

寸法(WxHxD)
57.9x12.7x36.8

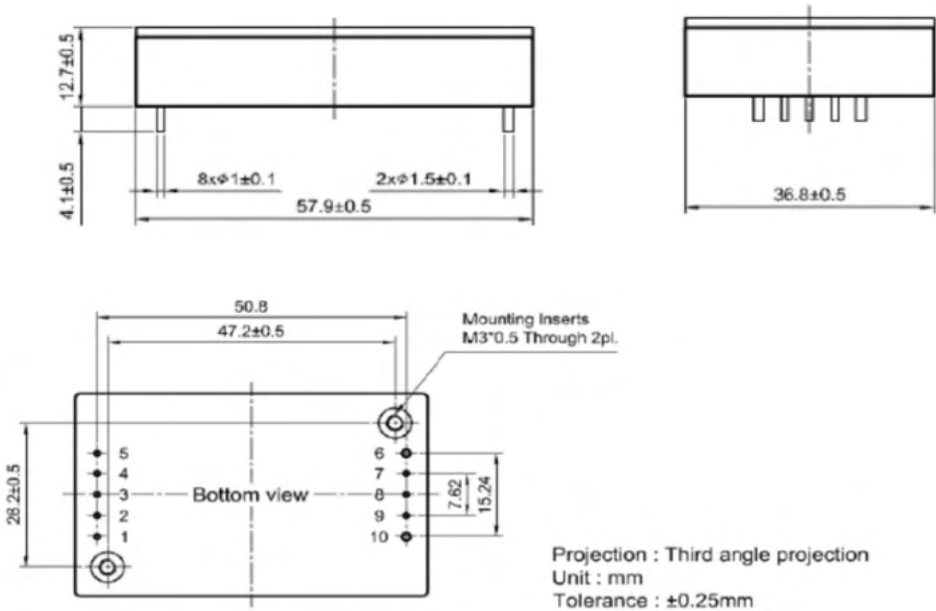

ピン配置

Pin	1	2	3	4	5	6	7	8	9	10
Single	+Vin	UVLO	Ctrl	Vbas	-Vin	-Vout	-S	Trim	+S	+Vout