




# 1:1 Input Range

# A1SCB-K5 Series

5.2kVDC isolation for 1 sec

## 1Watt SIP7 Package Single Output, 5.2kVDC Isolation, Operating Temp. -40to+100°C

型名	入力電圧(V)	出力電圧(V)	出力電流(mA)	効率(%)	負荷変動率	リップルノイズ
A1SCB-3.33.3K5	3.3	3.3	303	76	15% Max.	100mVp-p Max.
A1SCB-3.305K5		5	200	77	15% Max.	
A1SCB-3.312K5		12	84	79	10% Max.	
A1SCB-3.315K5		15	67	80	10% Max.	
A1SCB-053.3K5	5	3.3	303	76	15% Max.	
A1SCB-0505K5		5	200	79	15% Max.	
A1SCB-0512K5		12	84	78	10% Max.	
A1SCB-0515K5		15	67	80	10% Max.	
A1SCB-123.3K5	12	3.3	303	77	15% Max.	
A1SCB-1205K5		5	200	72	15% Max.	
A1SCB-1212K5		12	84	79	10% Max.	
A1SCB-1215K5		15	67	80	10% Max.	
A1SCB-243.3K5	24	3.3	303	76	15% Max.	
A1SCB-2405K5		5	200	78	15% Max.	
A1SCB-2412K5		12	84	79	10% Max.	
A1SCB-2415K5		15	67	79	10% Max.	

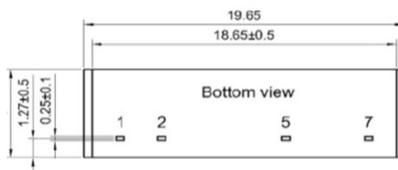

寸法(WxHxD)  
19.65x10.2x7.05

### ピン配置

Pin	1	2	3	4	5	6	7
single	+Vin	-Vin	No pin	No pin	-Vout	No pin	+Vout



# 1:1 Input Range

# A1SCB-K5 Series

5.2kVDC isolation for 1 sec

## 1Watt SIP7 Package Dual Output, 5.2kVDC Isolation, Operating Temp. -40to+100°C

型名	入力電圧(V)	出力電圧(V)	出力電流(mA)	効率(%)	負荷変動率	リップルノイズ
A1SCB-3.33.3DK5	3.3	±3.3	±152	80	15% Max.	100mVp-p Max.
A1SCB-3.305DK5		±5	±100	74	15% Max.	
A1SCB-3.312DK5		±12	±42	80	10% Max.	
A1SCB-3.315DK5		±15	±34	79	10% Max.	
A1SCB-053.3DK5	5	±3.3	±152	77	15% Max.	
A1SCB-0505DK5		±5	±100	73	15% Max.	
A1SCB-0512DK5		±12	±42	79	10% Max.	
A1SCB-0515DK5		±15	±34	80	10% Max.	
A1SCB-123.3DK5	12	±3.3	±152	79	15% Max.	
A1SCB-1205DK5		±5	±100	75	15% Max.	
A1SCB-1212DK5		±12	±42	79	10% Max.	
A1SCB-1215DK5		±15	±34	82	10% Max.	
A1SCB-243.3DK5	24	±3.3	±152	75	15% Max.	
A1SCB-2405DK5		±5	±100	81	15% Max.	
A1SCB-2412DK5		±12	±42	81	10% Max.	
A1SCB-2415DK5		±15	±34	82	10% Max.	

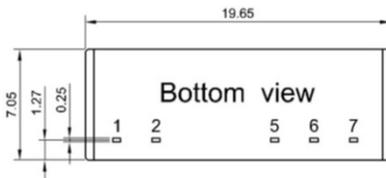

寸法(WxHxD)  
19.65x10.2x7.05

### ピン配置

Pin	1	2	3	4	5	6	7
Dual	+Vin	-Vin	No pin	No pin	-Vout	COM	+Vout